DATA SHEET



PRINTER'S MARKS

Please avoid including printer's marks such as crop marks, registration marks, or color control bars. These may otherwise be printed unintentionally.

FILE FORMATS

We accept your print files in the following formats: $EPS,\ TIF,\ {\rm or}\ PNG$

PAGE SIZE & ORDER

Make sure your layout pages are oriented correctly (portrait or landscape).

COLOR MODE

Printing is done in the CMYK color space. Therefore, your files must also be set up in CMYK. Please do not use Device-N or NChannel color spaces, as these can cause errors in the printing process.

COLOR PROFILE

Use the following color profile for your CMYK files: USWebCoatedSWOP

SPOT COLORS

Do not use spot or Pantone colors – nor any alternative color spaces. Spot colors will be automatically converted to CMYK, which may lead to color variations in the final result.

IMAGE RESOLUTION

A minimum resolution of *300 dpi* (dots per inch) is recommended to ensure sharp print quality. General rule: The higher the resolution, the better the result.


FONTS

For good readability, text should be at least *6 points* (2.1 mm) in size. All fonts used must be fully embedded. Alternatively, convert all text to outlines to avoid display errors.

LINES

Both positive and negative lines must be at least *0.5 points* (0.18 mm) thick – these minimum dimensions must also be maintained in scaled-down graphics.

Please create your print files exactly according to the specifications of this data sheet. This is the only way to ensure flawless processing.

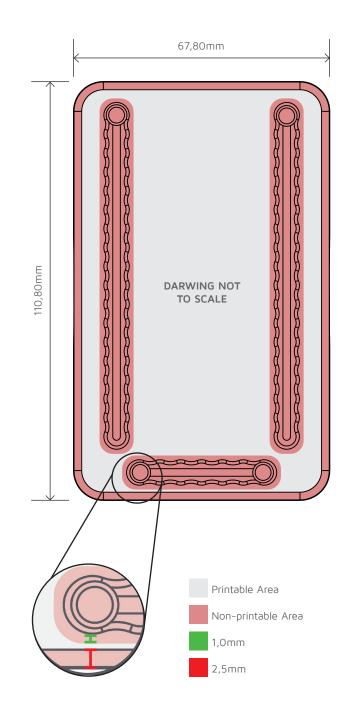





Tratter Engineering GmbH / Srl. • I-39100 Bolzano / Bozen • Via Waltraud Gebert-Deeg / Str. 10 Tel.: +39 0471 06 40 00 • E-mail: info@trattereng.com • Kodex SDI / Codice SDI: TULURSB Handelsregister Nr. / Registro imprese: 156223 • Mwst. Nr. / P. IVA: IT01674780216 Gesellschaftskapital / Capitale sociale: € 100.000,-